


QUICK USER GUIDE FOR CHARRED WOOD PRODUCTS

NOTE: Charred wood is liable to damages if not used carefully!



LOADING AND UNLOADING


For unloading and uploading always pack and stack planks the way the factory did ie. Two planks face up with a protective material, two face down. Before fitting, Inflamed, strongly advice to spread at least 10 planks and try to design to find the best match as planks are unique. Each plank has different look, thus it would be the best practice to find and match best looking.

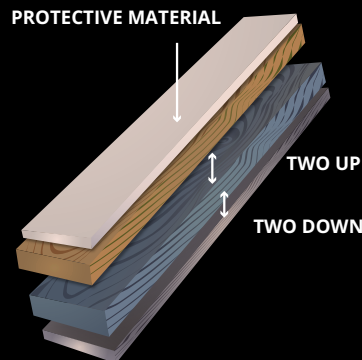


Before fitting, Inflamed, strongly advice to spread at least 10 planks and try to design to find the best match as planks are unique. Each plank has different look, thus it would be the best practice to find and match best looking planks.

MAINTENANCE


When planks are cut with any type of saw, you need to burn cut-end with a gas torch and oil the end with oil provided. Always care planks with care, do not stack on each other (facing up), do not put any heavy items on planks facing up (except decking after fitting). During the occasion that planks are facing up, strongly advised to lift them, do not pull trough or drag. Any action of this nature might cause the damage to the product. If there is/are any damaged board(s), in oil or in wood, fix it with an oil provided. Please put the protective gloves first, using the cloth or a sponge, gently and locally spread wood oil on the damaged spot, try to wet only damaged location (try to be as local as you can). Excessive oil clean with a dry cloth, especially on undamaged place.

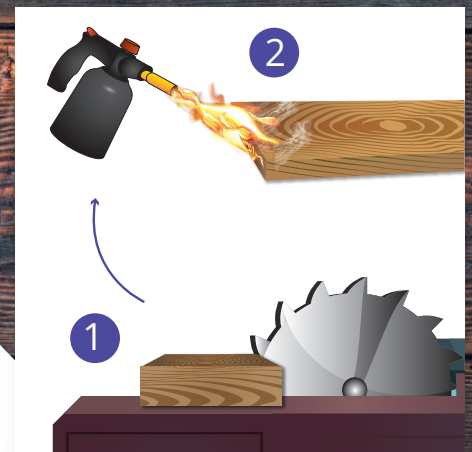

Screws head should be equal with a plank, do not screw inside or leave too much head of the screw outside.

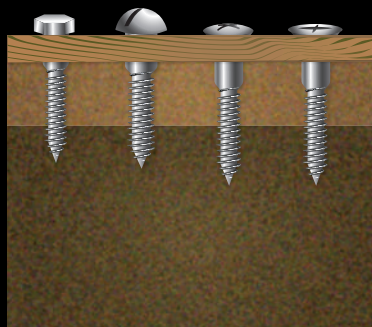

Only stainless steel screws to be used with charred wood. Two(2) screws should be used every 500-600mm (ie. 42mm screws should be used for 20mm thickness planks, approximately 40 screws per m²).

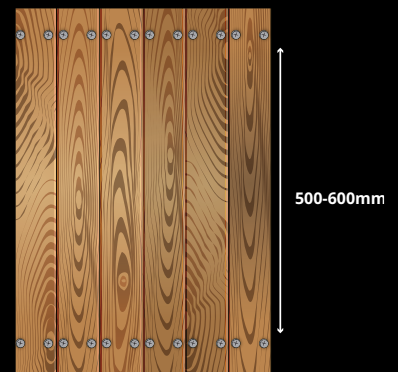

Maintenance depends on the product. Decking is advised more frequent re-oiling every 1-2 years, less heavy usage products such as cladding 5-10 years, depending on geographical location and wood type. Maintenance advised on each order individually.